


Jacket Marking:
 VDE / KEMA-KEUR /
 S+ / OVE / CEBC /
 S / D / N / FI / TUV /
 CE / CCC

Mold Markings:
 See Mold Embossing List

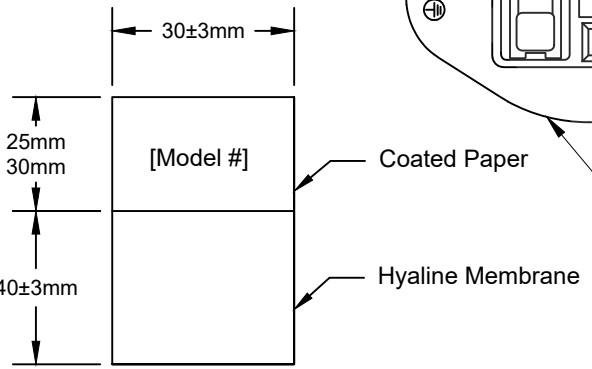

Markings:
 See Mold Embossing List

This cord may or may not have a label. If labeled, it may be imprinted or on a sticker.

Packing: Hanked and Tied to Ease Installation

No.	Specification	QTY	Remarks	Mold Embossing List	Tolerances	Approved	Date	StayOnline®					
1	H05VV-F 0.75/3C 300V 70° Black	1 PC		Vendor File # Xuanhua E257089	> 0 ± 0.30 mm	Checked	Date	Customer					
2	Plug BS 1363 UK Black Angled Down	1 PC		Power Fig E250704 Stay Online E250704	>1.0 ± 0.50 mm	Drawn	JMB	Date	12MAR2025	Model #	PFBS1363D75C1372HANK		
3	Connector IEC 60320 C13 Black	1 PC		Yung Li E152635 SSEMCO E340286	>20.0 ± 2.0 mm	Item No.	1647A			Material	PVC	Units	mm
4	LABEL: (40+30) * 30 mm	1 PC	MAX Length = 73mm	Scolmore E361125 Volex E62405 Well Shin E115330	Angle: ± 1°	Drawing No.	1647A		Rev.	A	Scale		