



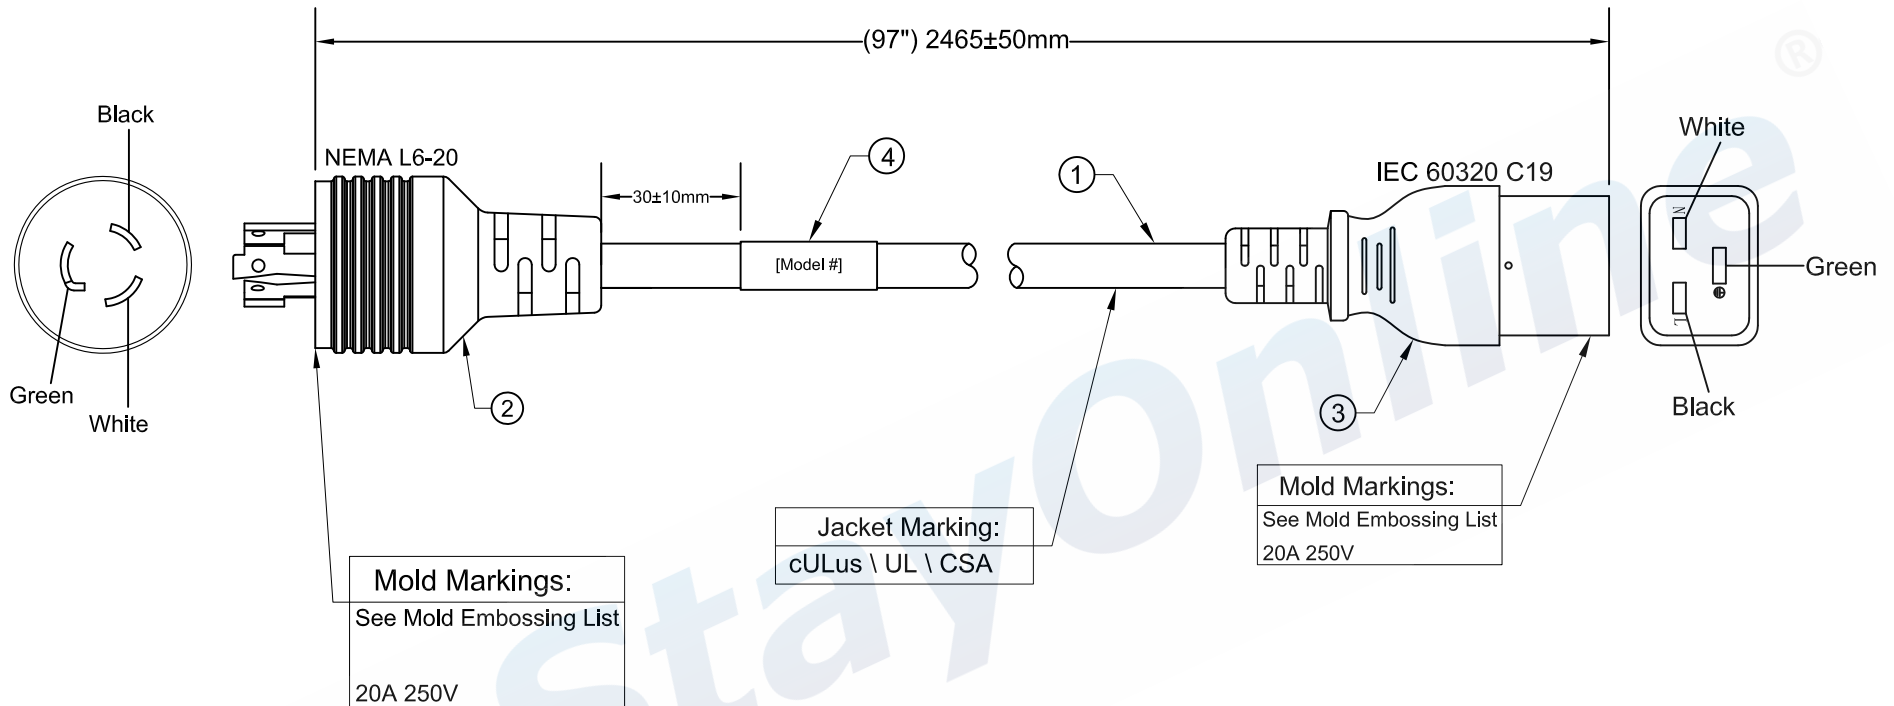

Mold Markings:
See Mold Embossing List
20A 250V

Jacket Marking:
cULus \ UL \ CSA

Mold Markings:
See Mold Embossing List
20A 250V

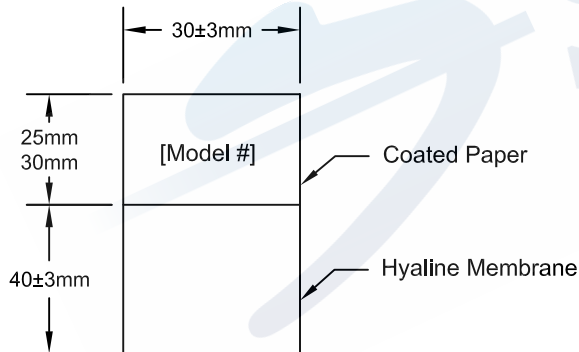

Packing: Bundled to Ease Installation

No.	Specification	QTY	Remarks	Mold Embossing List	Tolerances	Approved		Date		StayOnline®			
1	SJT 12/3c 105°C Black	1 PC		Vendor File #	> 0 ± 0.30 mm	Checked		Date		Customer			
2	Plug NEMA L6-20 Black	1 PC		Power Fig E250704 Stay Online E250704 Yung Li E152635	>1.0 ± 0.50 mm >10.0 ± 1.0 mm >20.0 ± 2.0 mm	Drawn	CJA	Date	06AUG2018	Model #	PFL62012C1997		
3	Connector IEC 60320 C19 Black	1 PC		SSEMCO E340286 Scolmore E361125 Volex E62405	Angle: ± 1°	Item No.	3680a			Material	PVC	Units	mm
4	LABEL: (40+30) * 30 mm	1 PC	MAX Length = 73mm	Well Shin E115330		Drawing No.	3680a		Rev.	A	Scale		