



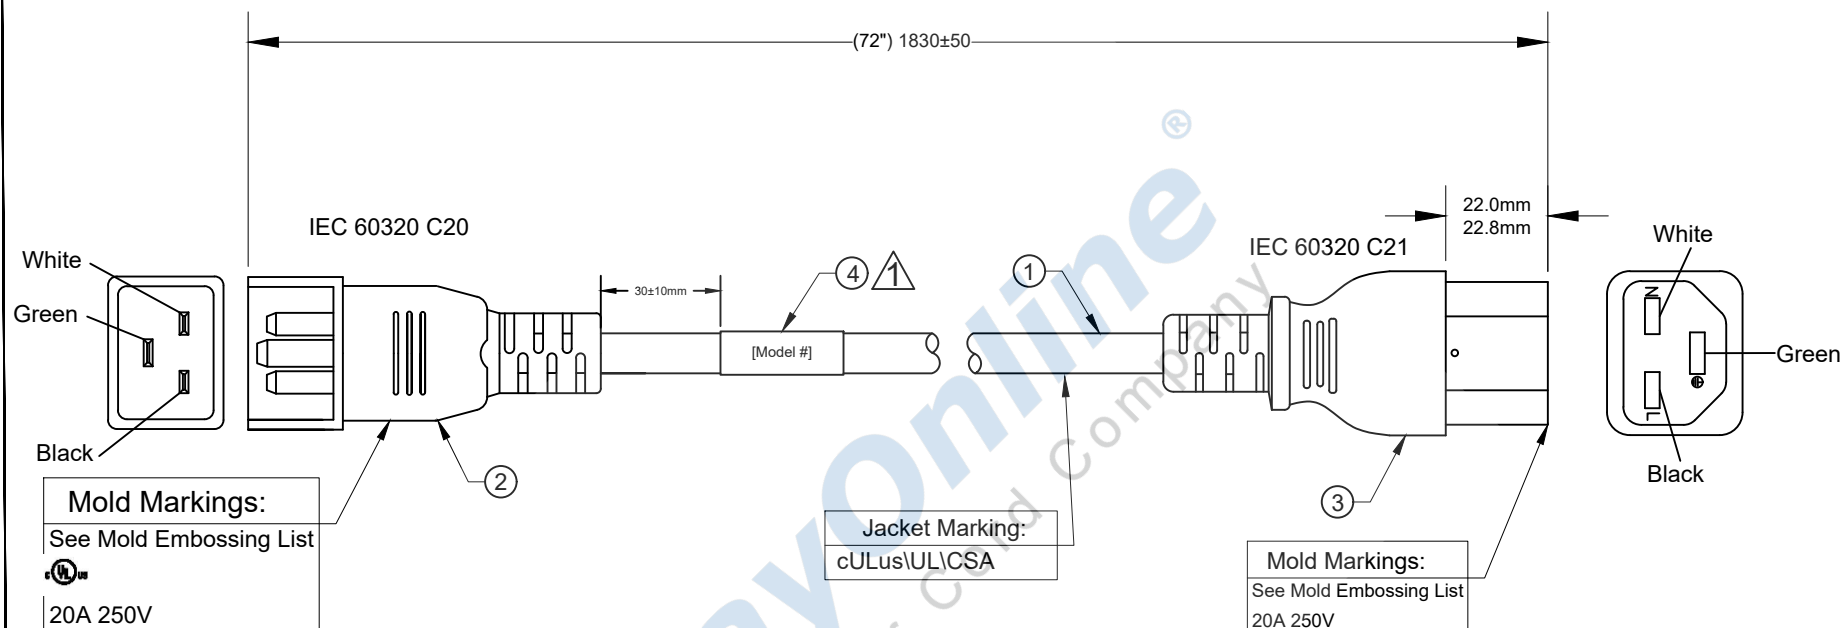

This cord may or may not have one or more labels. If labeled, they may be imprinted or on a sticker and may include one of the listed model number(s), length, rating or a combination of these.

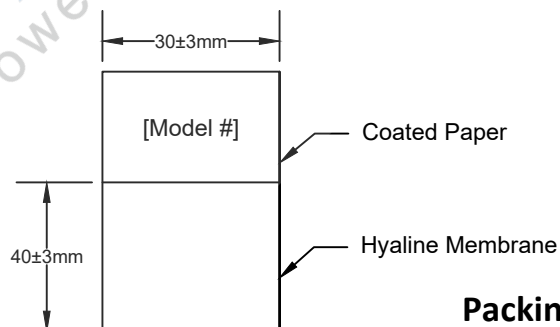

**Packing: Bundled to Ease Installation**

| No. | Specification                 | QTY  | Remarks |                                                                                                                                                                                                                                                                             |                                                                                        |             |      |      |           |                    |                              |       |    |
|-----|-------------------------------|------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------|------|------|-----------|--------------------|------------------------------|-------|----|
| 1   | SJT 12/3c 105°C Black         | 1 PC |         | Mold Embossing List                                                                                                                                                                                                                                                         | Tolerances                                                                             | Approved    |      | Date |           | <b>StayOnline®</b> |                              |       |    |
| 2   | Plug IEC 60320 C20 Black      | 1 PC |         | Vendor File #                                                                                                                                                                                                                                                               | > 0 ± 0.30 mm<br>>1.0 ± 0.50 mm<br>>10.0 ± 1.0 mm<br>>20.0 ± 2.0 mm<br><br>Angle: ± 1° | Checked     |      | Date |           | Customer           |                              |       |    |
| 3   | Connector IEC 60320 C21 Black | 1 PC | 155°C   | Xuanhua E313867<br>Xuanhua E257089<br>Power Pig E250704<br>Stay Online E250704<br>Yung Li E1102635<br>SIEMCO E340286<br>Sodmore E361125<br>Volex E02405<br>Well Shin E110330<br>King Cord E8554<br>Young Li E241374<br>NSL Enterprises E210037<br>Guang Zhou Co Ltd E318430 |                                                                                        | Drawn       | JMB  | Date | 10NOV2025 | Model #            | PFC2012C2172<br>P-3325-06BLK |       |    |
| 4   | LABEL: (40+30) * 30 mm        | 1 PC |         |                                                                                                                                                                                                                                                                             |                                                                                        | Item No.    | 5176 |      |           | Material           | PVC                          | Units | mm |
|     |                               |      |         |                                                                                                                                                                                                                                                                             |                                                                                        | Drawing No. | 5176 | Rev. | E         | Scale              |                              |       |    |