





CAT. NO.	CONFIGURATION	RATING
CS6361C		50A 125V 2-POLE 3-WIRE
CS8265C		50A 250V 2-POLE 3-WIRE
CS8465C		50A 480V 2-POLE 3-WIRE
CS6365C		50A 125/250V 3-POLE 4-WIRE
CS8365C		50A 250V 3 PHASE 3-POLE 4-WIRE
CS8165C		50A 480V 3 PHASE 3-POLE 4-WIRE
HBL3763C		50A 250V 50A 600V 2-POLE 3-WIRE
HBL3765C		50A 250V DC 50A 600V AC 3-POLE 4-WIRE
HBL7765C		50A 250V DC 50A 600V AC 3-POLE 4-WIRE

M-6590 9

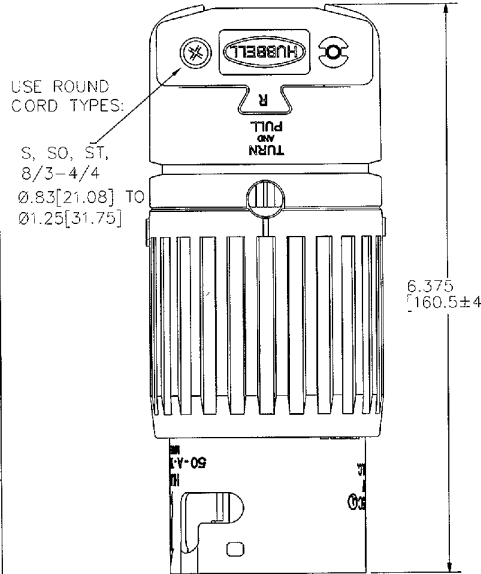

DESCRIPTION		MATERIAL	FINISH
FRONT HOUSING	NYLON		
BLADE HOLDER	POLYESTER		
POWER BLADES	BRASS		
GRD. CONT. SPR	COPPER		
GRD. CONTACT RIVET	BRASS		
SHELL	STAIN ST.		
RETAINER	POLYESTER		
BOX TERMINAL	COPPER		
TERM. SFT. SCREW	STAIN ST.		
SEAL	NEOPRENE		
SEAL CUP	NYLON		
REAR HOUSING	NYLON		
CORD GRIPS	POLYESTER		
GRIP SCREWS	STAIN ST.		
LATCHES	NYLON		

SEE TABLE

REPEATABLE NON-REPEATABLE

B

M-6590

9

9 REVISED PER DCN 22024 SPN DJP 5/19/16

8 WITH NO CHANGES TO PART GEOMETRY. PER DCN 21895 SPN DJP 2/5/16

REV	DESCRIPTION	APP	DATE
9	REVISED PER DCN 22024 SPN	DJP	5/19/16
8	WITH NO CHANGES TO PART GEOMETRY. PER DCN 21895 SPN	DJP	2/5/16

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
50A TWIST-LOCK PLUGS
THREE AND FOUR WIRE

WRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

XX = ±.01
XXX = ±.005
ANGLES = ±2°

DR. BY	SR	APP. BY
TR. BY	SCALE	DATE
CHK BY	DATE 2/7/2015	

Key Features

- CS8165C
- 480 Volts / 50 Amp
- UL, CSA

StayOnline Item #
6975

CODE 74545