



- Compatibility with Hubbell NEMA 20/30 Amp 3 Wire Twist-Lock Plugs
- Add IP55 moisture resistance to existing Insulgrip plugs for outdoor and wet locations



M-14685

1

StayOnline Item #

8018ST

StayOnline®
The Power Cord Company

USA: (888) 346-4688 International: +1 919.529.3133
www.stayonline.com sales@stayonline.com

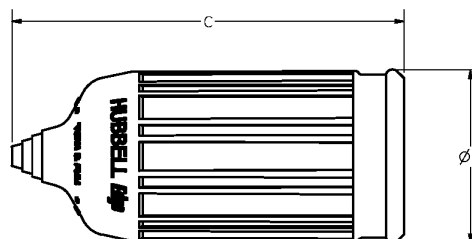
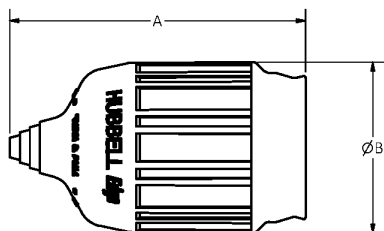
CAT. NO.	SIZE	WHERE USED	COLOR	"A"	"B"	"C"	"D"
HBL6031ST	3 WIRE	FOR PLUGS WHEN USED IN A CORD SET. FOR CONNECTORS WHEN USED WITH FLANGED INLETS.	BLACK	4.39	Ø 2.53		
HBL60CM31ST	3 WIRE	FOR PLUGS WHEN USED IN A CORD SET. FOR CONNECTORS WHEN USED WITH FLANGED INLETS.	YELLOW	4.39	Ø 2.53		
HBL6032ST	3 WIRE	FOR CONNECTORS WHEN USED IN A CORD SET.	BLACK			5.81	Ø 2.57
HBL60CM32ST	3 WIRE	FOR CONNECTORS WHEN USED IN A CORD SET.	YELLOW			5.81	Ø 2.57
HBL6035ST	4&5 WIRE	FOR PLUGS WHEN USED IN A CORD SET. FOR CONNECTORS WHEN USED WITH FLANGED INLETS.	BLACK	4.69	Ø 2.60		
HBL60CM35ST	4&5 WIRE	FOR PLUGS WHEN USED IN A CORD SET. FOR CONNECTORS WHEN USED WITH FLANGED INLETS.	YELLOW	4.69	Ø 2.60		
HBL6036ST	4&5 WIRE	FOR CONNECTORS WHEN USED IN A CORD SET.	BLACK			6.09	Ø 2.85
HBL60CM36ST	4&5 WIRE	FOR CONNECTORS WHEN USED IN A CORD SET.	YELLOW			6.09	Ø 2.85

NOTES:

1. FITS EdgeConnect™ INSULGRIP® DEVICES ONLY.
2. IP55 SUITABILITY WHEN INSTALLED AND USED PROPERLY WITH MATING COMPONENTS.

CAGE CODE 74545

M-14689	1
---------	---

[illegible]

1	INITIAL RELEASE PER DCN 230802032315 AMS	DL	8/3/23
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE.
DIMENSIONS ARE IN INCHES [mm].

TITLE SEAL-TITE® BOOTS FOR 20A & 30A
EdgeConnect™ INSULGRIP®
TWIST-LOCK DEVICES



WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TO 1/4" ± .2°	DR. BY	AMS	SCALE	3/4"
	CHK. BY	DL	DATE	7/5/23

Provides IP55 protection when installed on a compatible plug.