
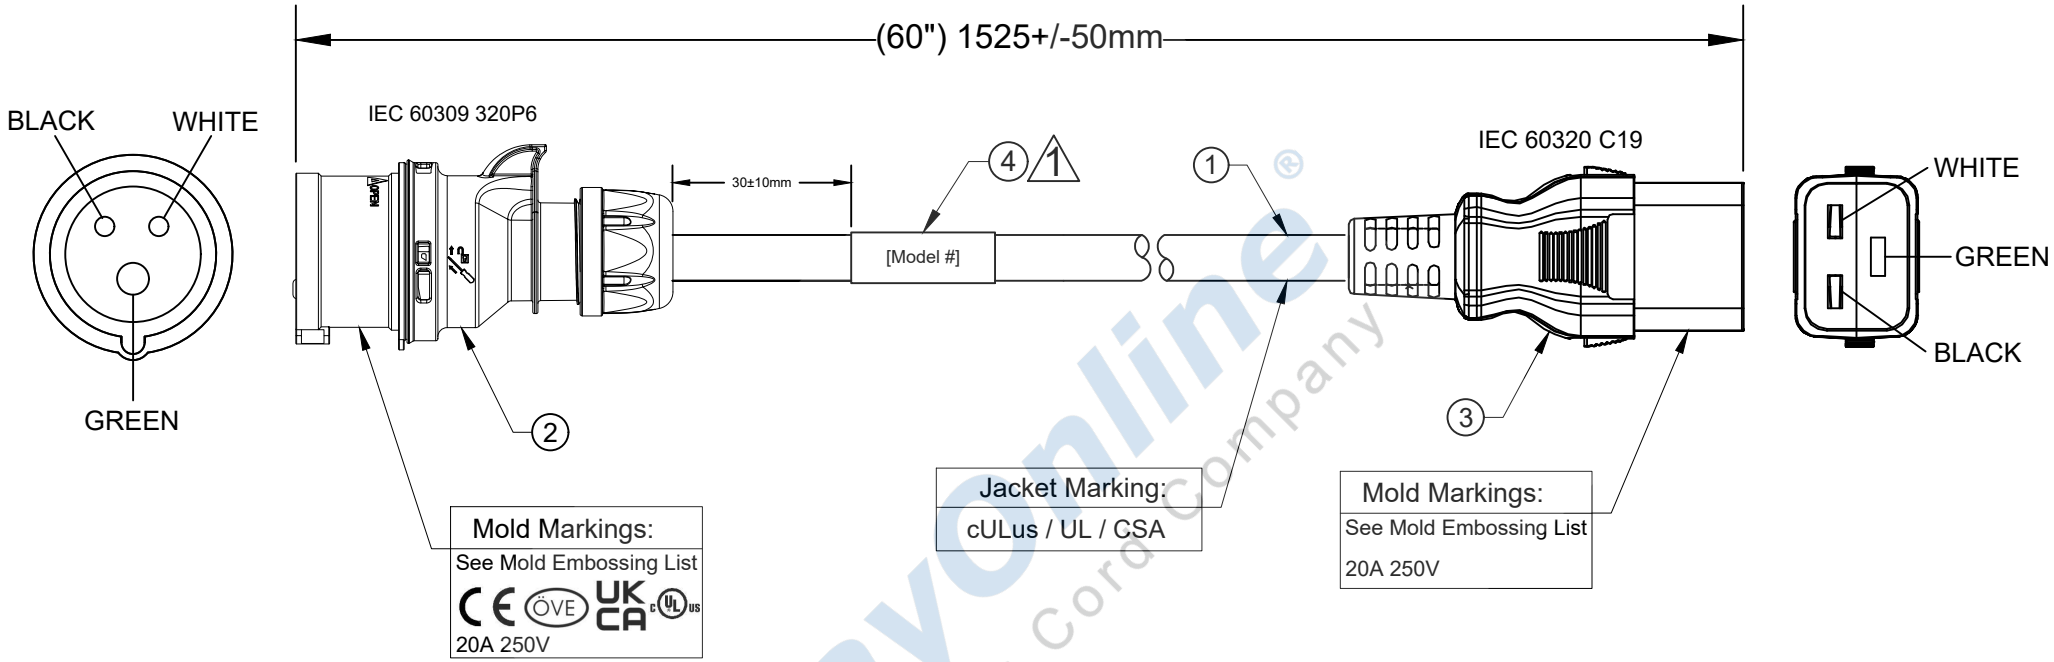


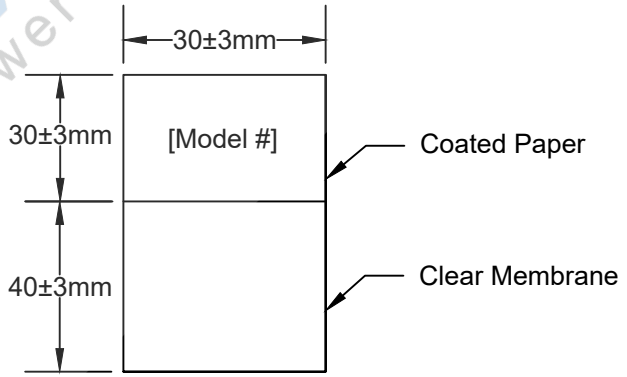

1. This cord may or may not have one or more labels. If labeled, they may be imprinted or on a sticker and may include (but is not limited to) one of the listed model number(s), length, rating or a combination of these.

2. Jacket type can come in either SJT or SJTW.

Packing: Bundled

No.	Specification	QTY	Remarks
1	SJT / SJTW 12/3c 105°C Black	1 PC	2
2	Plug IEC 60309 Blue	1 PC	Black Base
3	Connector IEC 60320 C19 Black	1 PC	WS-Lock
4	LABEL: (40+30) * 30 mm	1 PC	MAX Length = 73mm

Mold Embossing List

Vendor File #	
Xuanhua	E313867
Xuanhua	E257089
Power Fig	E250704
Power Fig	E502504
StayOnline	E250704
StayOnline	E502504
Yung Li	E152635
Yung Li	E241374
SSEMCO	E340286
Scolmore	E361125
Volex	E62405
Well Shin	E115330
King Cord	E85554
MSL Enterprises	E210037
Guang Zhou Co Ltd	E318430
Kalas MFG	E31793

Tolerances

> 0 ± 0.30 mm
>1.0 ± 0.50 mm
>10.0 ± 1.0 mm
>20.0 ± 2.0 mm

Angle: ± 1°

Approved		Date		Customer			
Checked		Date		Model #	PF320P612C19WS60		
Drawn	GAC	Date	15OCT2026	Material	PVC	Units	mm
Item No.	81057						
Drawing No.	81057	Rev.	C	Scale			

StayOnline®