

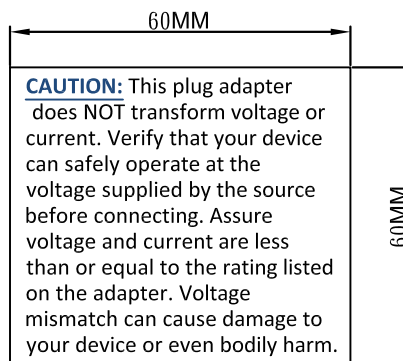
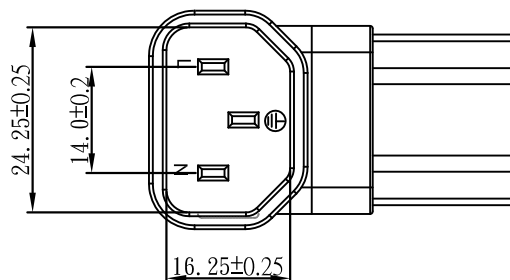
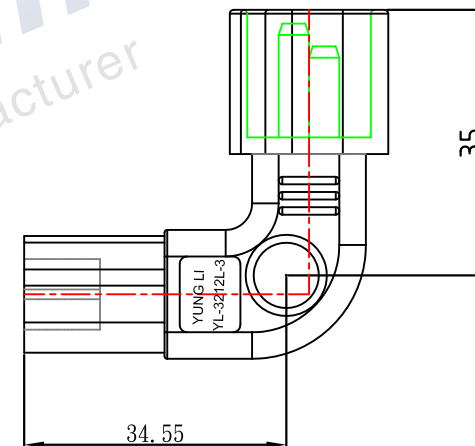
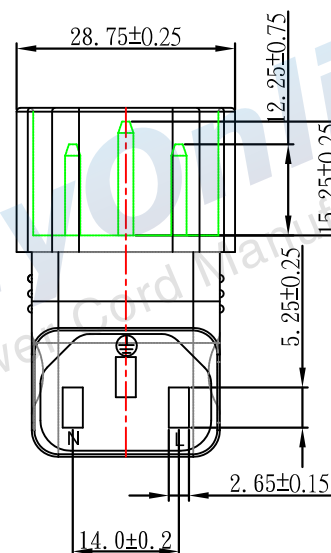


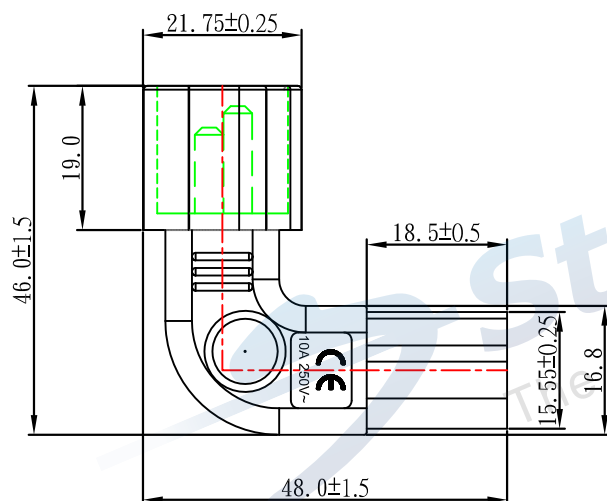

Note:

- 1.Rating:10A 250V
- 2.Insulation Resistance:100M Ω
- 3.Dielectric Voltage:2000V/sec

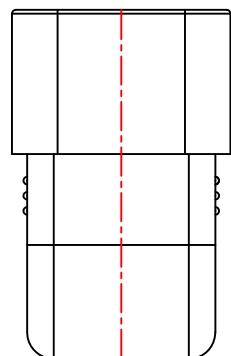

TOLERANCE >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	APPROVED		DATE		StayOnline® The Power Cord Company			
	CHECKED		DATE					
	DRAWN	SUKI	DATE	21.02.04	CUSTOMER			
	TYPE	YL-3212L-3			P/N			
	DRAWING NO.	CY-A3212L3	REV	C	MATERIAL	P. V. C	UNIT	mm
				SCALE	1:1			