


CUST P/N THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SSEMCO. ANY RELEASE TO THIRD PARTY OR REPRODUCTION IN PART OF WHOLE WITHOUT WRITTEN PERMISSION OF SSEMCO IS PROHIBITED.

RoHS COMPLIANT  
Pat.US 8,469,734

REVISION HISTORY		DATE	APPROVED
ZONE	REV	DESCRIPTION	
	A	Initial Design	2013/6/30 LIGHT C
	B	US PAT No add	2018/12/3 Daniel C
	C	Mark Template Change	2022/01/27 Daniel C
	D	Locking ear color change	2022/07/01 Daniel C

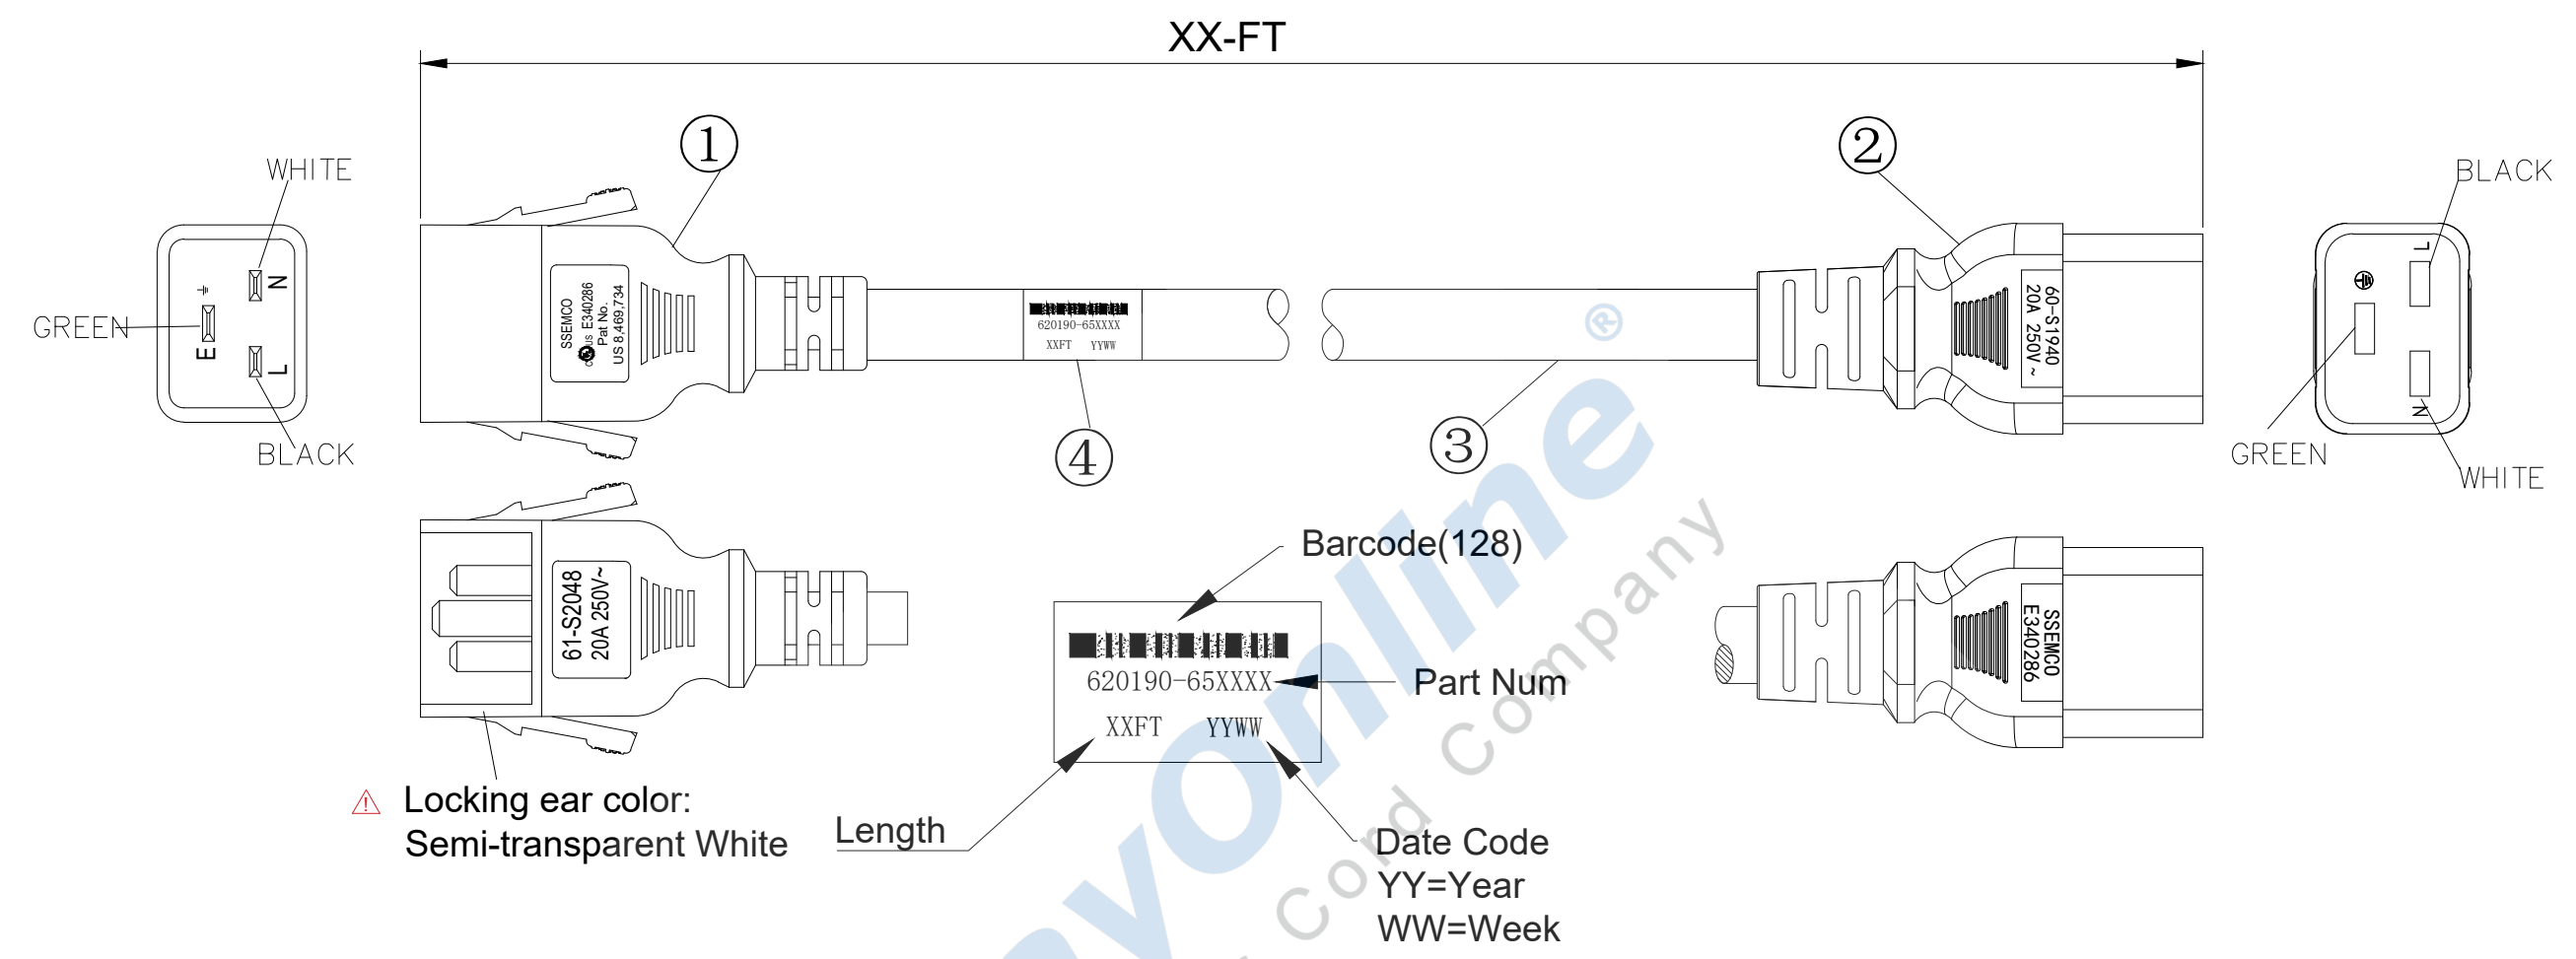

Ordering Information:

620190 - 6 5 XXX X

**SERIES**

**WIRE GUAGE:**  
6:12AWG

**COLOR CODE:**  
0=Black,1=Gray,2=Blue,4=Green,  
6=Orange,7=Red,8=Yellow,9=White

**CABLE LENGTH:**  
For Inch System:  
First two digits=feet; Last digit=inch

**WIRE TYPE:**  
5: SJT

Distributed by: **StayOnline**  
The Power Cord Company

ITEM	DESCRIPTION	APPROVAL	QTY
4	Label		1
3	12AWG SJT 3C 105°C 300V~	UL/cUL or CSA	1
2	IEC320 C19 20A 250V~	UL/cUL	1
1	P-Lock® IEC320 C20 20A 250V~	UL/cUL	1

UNLESS OTHERWISE SPECIFIED		FUZHOU SSEMCO LTD	
1) DIMENSIONS ARE IN MILLIMETERS		(SSEMCO®)	
2) TOLERANCES ARE:		Product Name	
For Inch System		IEC P-Lock® POWER CORD	
Cable Length < 4FT: ±1.18in		IEC P-Lock® C20 to C19 20A/250V	
Cable Length ≥ 4FT: ±1.97in		ITEM NO.	620190-65XXXX
Cable Length > 10FT: ±3.94in		DWG NO.	620190-65XXXX SHEET 1 OF 1
For Metric System		THIRD ANGLE PROJECTION	
Cable Length < 1000mm: ±30mm		Des'd By:	Light C
Cable Length ≥ 1000mm: ±50mm		Drawn By:	Alan M
Cable Length > 3000mm: ±100mm		Review By:	Daniel C